



**V351F-FE**

**V351F-FE**

**PRESSIONE**

- Pressione di esercizio: \_\_\_\_\_ da 1 a 6 bar

**PORTATA (vedi diagramma sotto)**

- Portata di servizio (Delta P = 1 bar): \_\_\_\_\_ 23 mc/h

- Portata di servizio (Delta P = 2 bar): \_\_\_\_\_ 30 mc/h

**TEMPERATURA DI ESERCIZIO:** \_\_\_\_\_ da 5 a 40° C

**MATERIALE CORPO VALVOLA:** \_\_\_\_\_ ABS + FV

**POTENZA ELETTRICA** \_\_\_\_\_ vedi timer

**DIMENSIONI**

- Attacchi: \_\_\_\_\_ 2 1/4" maschio (50 mm)

- Montaggio: \_\_\_\_\_ in testa alla bombola

**RACCORDI INGRESSO/USITA DISPONIBILI**

- Raccordo pvc 2 1/4" - Ø 50 mm incollaggio

- Raccordo pvc 2 1/4" - 1 1/2" femmina

- Raccordo ottone 2 1/4" - 1 1/2" femmina

- Raccordo ottone 2 1/4" - 2" femmina

**CERTIFICATI**

- Conformità al DM 174 del 06/04/2004

- 2002/95/EC (RoHS)

**PRESSURE**

- Operating Pressure: \_\_\_\_\_ from 1 to 6 bar

**FLOW RATE (see flow chart below)**

- Service Flow rate (1 bar drop): \_\_\_\_\_ 23 mc/h

- Service Flow rate (2 bar drop): \_\_\_\_\_ 30 mc/h

**OPERATING TEMPERATURE:** \_\_\_\_\_ from 5 to 40° C

**VALVE MATERIAL:** \_\_\_\_\_ ABS + FV

**ELECTRICAL RATE** \_\_\_\_\_ see timers

**DIMENSIONS**

- Connections: \_\_\_\_\_ 2 1/4" male (50 mm)

- Mounting: \_\_\_\_\_ Top on tank

**PIPING FITTING IN/OUT AVAILABLE**

- Pvc fittings 2 1/4" - Ø 50 mm (to be glue)

- Pvc fittings 2 1/4" - 1 1/2" female


- Brass fittings 2 1/4" - 1 1/2" female

- Brass fittings 2 1/4" - 2" female



**CERTIFICATES**

- DM 174 DD April 06, 2004 compliance



- 2002/95/EC (RoHS)

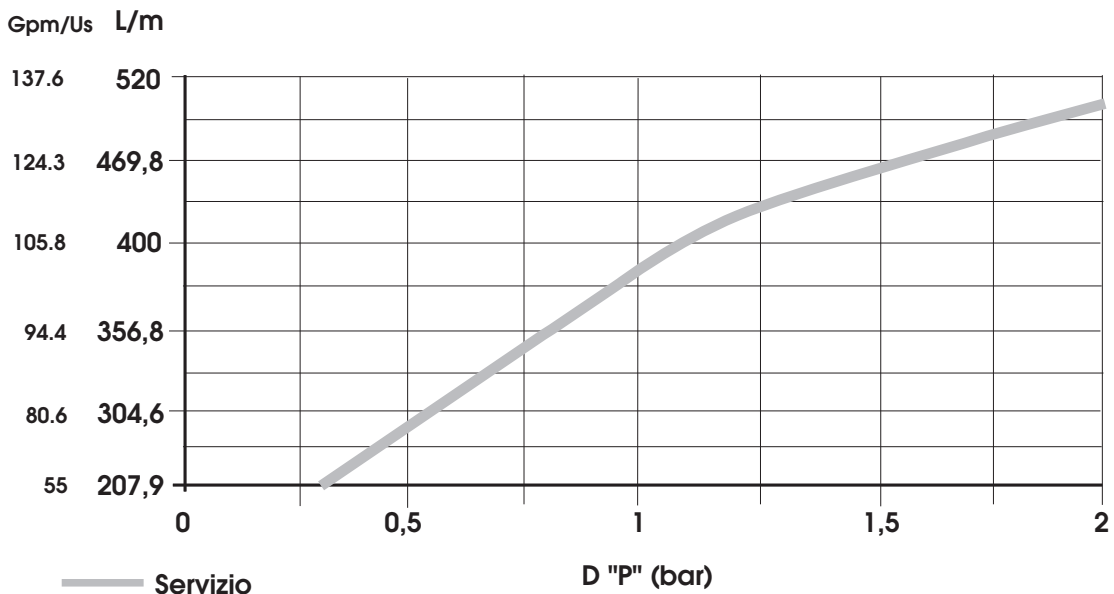



SCHEMI DI FLUSSO/FLOW DIAGRAMS

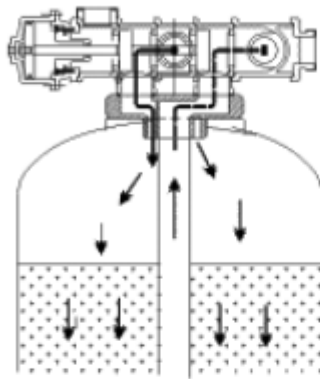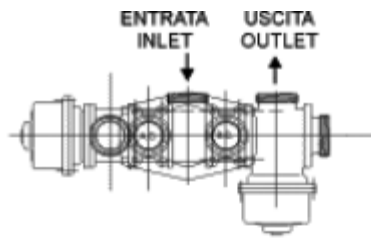

SERVIZIO  
SERVICE

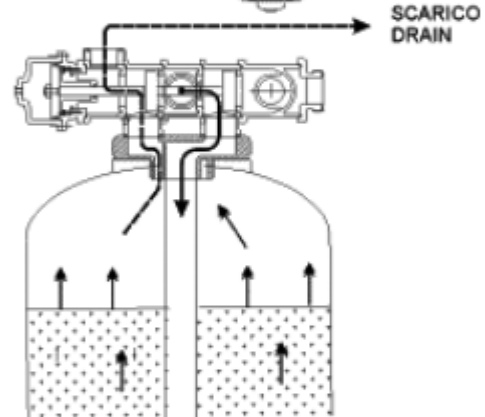


CONTROCORRENTE  
BACKWASH

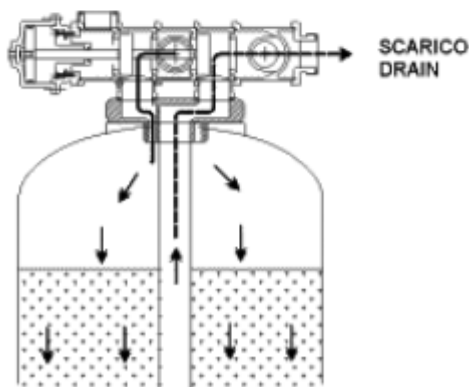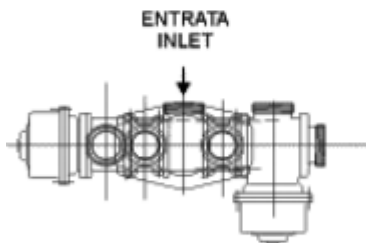

LAVAGGIO  
FAST RINSE

DIMENSIONI/DIMENSIONS

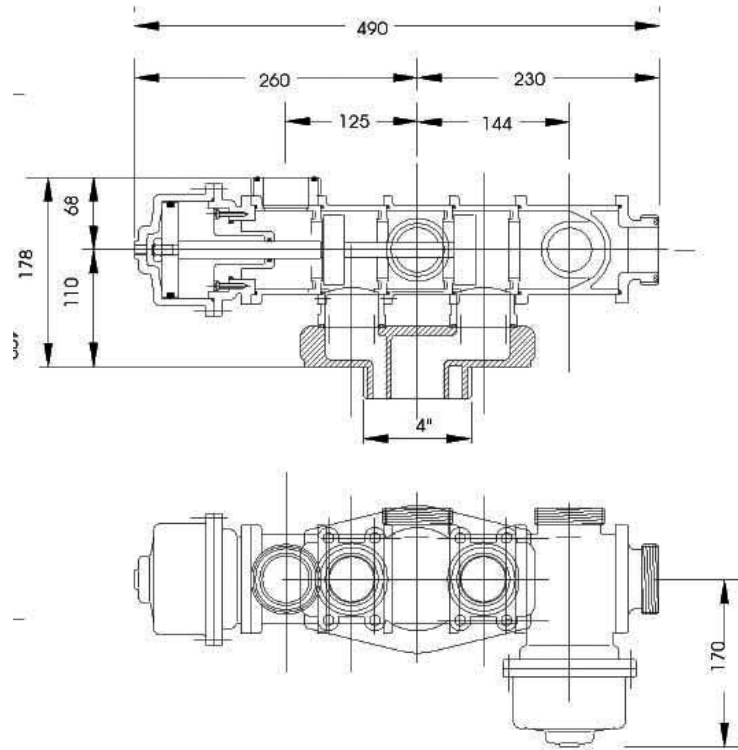

COLLEGAMENTI CON TIMER 2 PILOTI/CONNECTIONS WITH 2 PILOTS TIMER

